



Unidrive 

**THE
BENCHMARK**


Universal AC Drive
Solutions Platform



Unidrive **SD** is the Solutions Platform

AC DRIVE 0.75kW TO 132kW

What makes Unidrive **SD the benchmark in AC drives?**

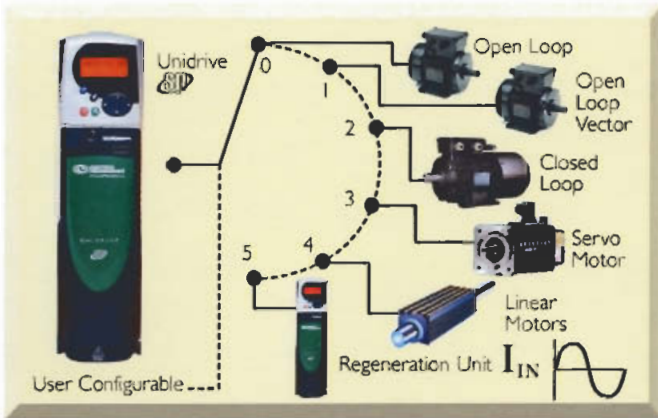

From the simplest to the most complex AC drive application, Unidrive **SD** is a truly scalable Solutions Platform.

Unidrive **SD** is so flexible it can be personalised to your requirements, to lower total costs whilst improving your productivity – Unidrive **SD** rewrites the standard for all drive users. As a Solutions Platform with ultimate flexibility, it is the point from which all drive users should measure themselves – it is

THE BENCHMARK



Unidrive **SD** & its Integration Flexibility

pages 1 – 3

Unidrive **SD** – Performance, Configuration and Set up

pages 4 – 7

System Design

pages 8 – 9

Integration Options

pages 10 – 11

PLC and Motion Functionality

pages 12 – 15

Specifications, Ordering and Applications

pages 16 – 19

Unique integration


Power Range at a Glance

VOLTS	SIZE 1		SIZE 2		SIZE 3		SIZE 4		SIZE 5		SIZE 6		SIZE 7	
	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp	kW	hp
200 – 240	3	3	7.5	10	15	20	30	40	–	–	–	–	–	–
380 – 480	5.5	7.5	15	20	30	40	55	75	90	125	132	200	200	300
500 – 575	–	–	–	–	18.5	25	45	60	75	100	110	150	150	200
500 – 690	–	–	–	–	–	–	55	75	90	125	132	150	185	250


Highest rating in each size is shown, full table inside back page.

 Available soon.

Drive Programming and Operator Interface

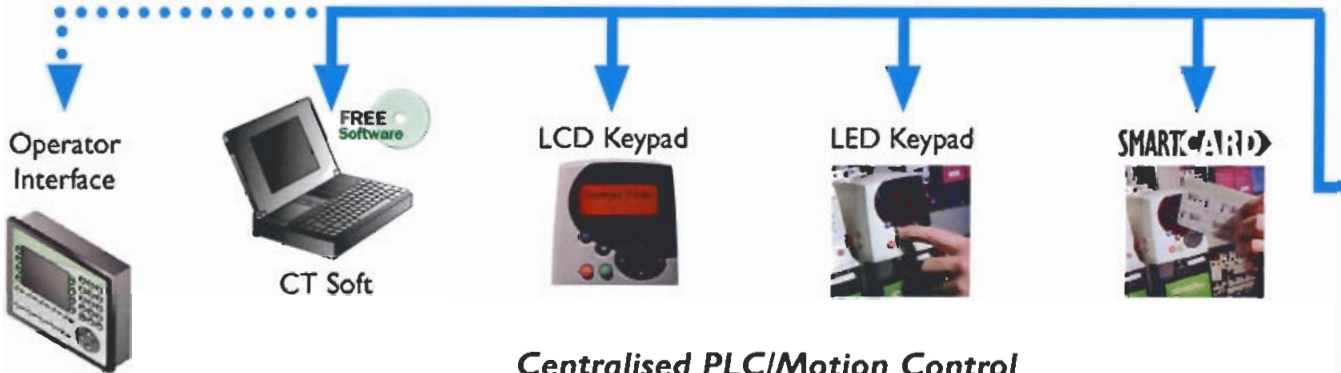

Centralised PLC/Motion Control

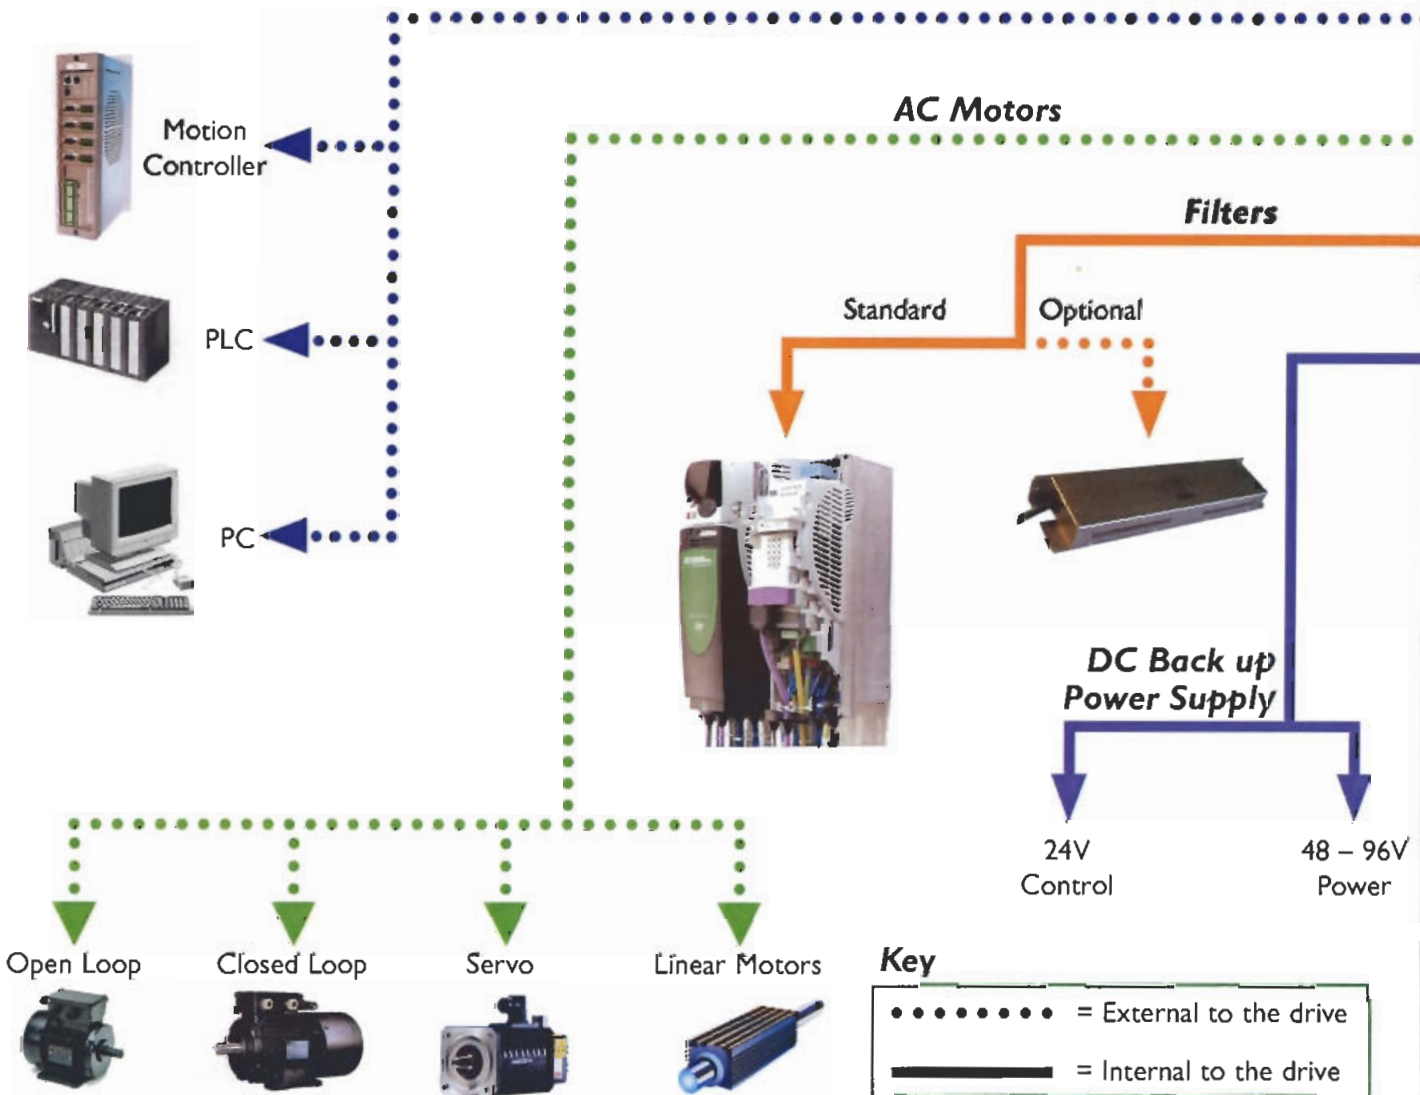


flexibility with Unidrive - the


5 Analogue I/O SM-I/O Plus SM-I/O Lite SM-I/O Timer SM-I/O 120V SM-PELV Remote I/O
 7 Digital I/O
 1 Secure Disable



Input/Output




Unidrive  - The Solutions Platform AC drive that delivers more performance and maximum productivity to users through its unique approach to your application.

From stand alone to complex multidrive applications, configure the Unidrive  to the level of integration to match your application.

Unidrive  - The Solutions Platform AC drive that matches your application perfectly.

Communications

Standard Options

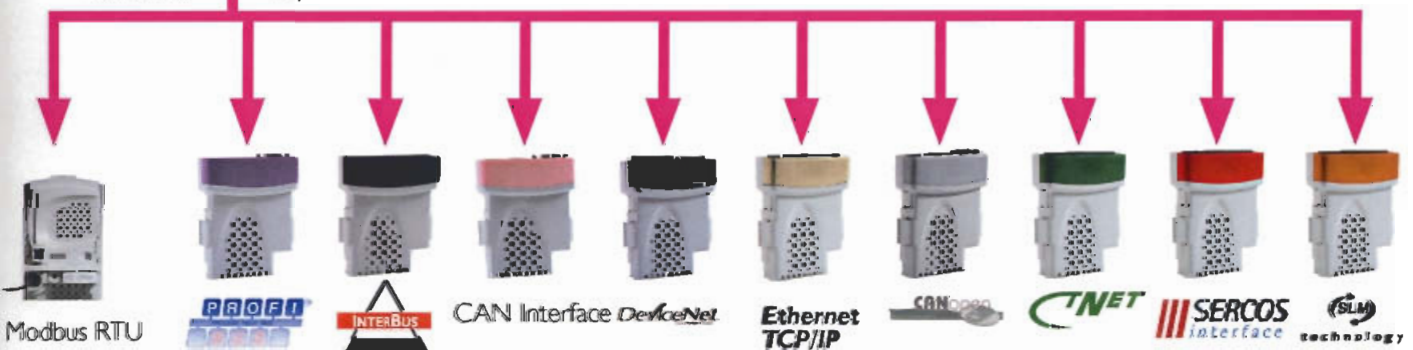

Solutions Platform

Applications with PLC or Motion functionality

SM-Applications Lite **OR** SM-Applications



SM-EZMotion



On board functionality

Programming Platform
SyPTLite **OR** SyPTPro (IEC61131-3)

Programming Platform
Power ToolsPro
Motion Made Easy
Indexing
Gearing
Profiles


PLC Functionality
Function Block Programming
Ladder Logic Sequencing

AND

Motion Functionality
Advanced Position Controller
Function Block Programming
Ladder Logic Sequencing



Automation Hierarchy

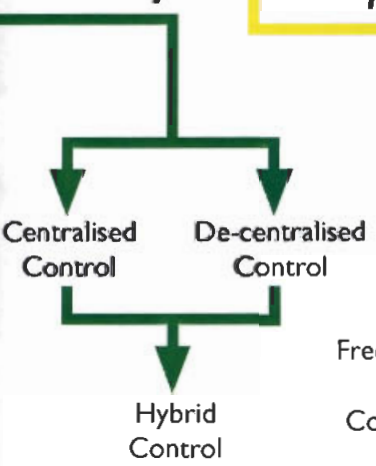

Feedback

Standard Options

SinCos
Quadrature
Frequency/Direction
Clockwise/
Counter clockwise



SM-Universal Encoder Plus



Accepts or replicates all standard feedback types

SM-Encoder Plus




Quadrature

SM-Resolver





Unidrive


OVERVIEW OF THE SOLUTIONS PLATFORM

- **Universal Digital AC Drive**
- **0.75 to 30kW, 3 phase, 200-240 VAC**
- **0.75 to 132kW, 3 phase, 380-480 VAC**
- **1.5 to 110kW, 3 phase, 575 VAC**
- **18.5 to 132kW, 3 phase, 690 VAC**
- **Five operating modes with energy-saving Power Factor Control in Regen Mode***
- **Secure Disable for contactor elimination to EN954-1 cat 3**
- **SMART  - Parameter cloning and back up card**
- **Universal feedback interface with 12 selectable modes**
- **High resolution analog input (16 bit plus sign)**
- **RS485 Interface for PC connection**
- **Dual duty ratings: Normal and Heavy**
- **Three zero-space universal option slots**

Multiple Fieldbus Capability

The Unidrive  provides unrivaled fieldbus flexibility. In addition to the standard Modbus RTU port, up to three fieldbus option modules can be installed in the Unidrive 's option slots.

PLC/Motion Functionality with Unidrive

In addition to the extensive drive configuration capabilities of the Unidrive , scalable programming is available to solve virtually any application requirements.

48-96V DC Main Power Supply Input

Ideally suited for elevator rescue and machine tool set up.


Comprehensive Autotune

Inertia measurement and static autotune reduce startup time.

Keypad Options

Choose no keypad, LED keypad or LCD keypad based on the system design and operating environment.


Drive Mounted Brake Resistor

Unidrive  sizes 1 and 2 feature a drive mounted brake resistor option to reduce panel space requirements.

*Note: Additional components are necessary to produce a regen drive package.




Typical Applications

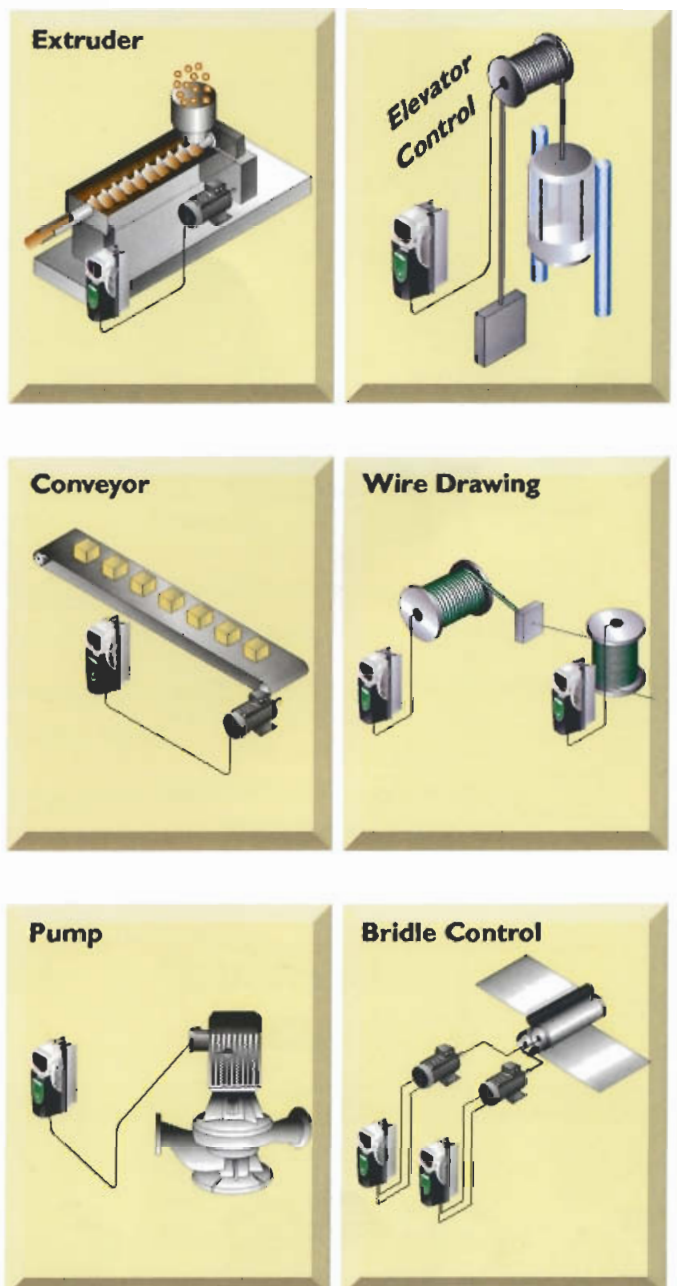

Unidrive


SOLUTIONS PLATFORM HIGHLIGHTS

Unidrive  has a common control interface for the entire range.

- Comprehensive autotune features
 - quick and predictable commissioning
- Synchronised control loops for deterministic control
 - ideal for motion applications
- Smooth changes between speed and torque control
 - **stepless gain change** for online tuning

Control

Switching Frequency 3, 4, 6, 8, 12, 16 kHz
 Output Frequency 0 to 3000 Hz (Open loop)
 Output Speed 0 to 40,000 rpm (Closed loop)
 Frequency Accuracy $\pm 0.01\%$ of full scale
 Frequency Resolution 0.001 Hz
 Analog Input 16 Bit + sign (qty 1), 10 Bit + sign
 Resolution (qty 2)
 Serial 2 or 4-wire RS232/RS485. Protocol
 Communications is Modbus RTU or ANSI x 3.28-2.5
 -A4 Baud rate 300 to 115,200
 Braking DC injection braking (stopping and
 holding) standard. Dynamic braking
 transistor standard
 Supply Dip Up to 1 second depending on
 Ride Through inertia and decel time




Unidrive 's speed loop step response

Switching Frequency = 12kHz
 Damping Factor = 1.0
 Bandwidth as shown

Autotune

- Stationary autotune
 - Measures stator resistance and voltage offset for dynamic vector control (for open and closed loop)
 - Ideal for tuning loaded motors (eg elevators). Power factor must be entered manually from nameplate
- Rotating autotune
 - Incorporates stationary autotune and then measures power factor
 - Low speed autotune to set phase angle and current loop
 - High speed rotating autotune sets up inertia measurement and speed loop
- Inertia measurement
- Servo autotune with minimal movement (5° electrical)
 - Primarily for linear motors, but also useful for rotary motors where excessive shaft movement during autotune is unacceptable eg machine tools
 - Ideal for applications with non-absolute position feedback

SYNCHRONISED CONTROL LOOPS

All drive (and option module) control loops are synchronised together and can synchronise with an external source. This enables precise multi-axis motion co-ordination with Unidrive .

Position loop

- Update time of 250µs; bandwidth 8Hz

Speed loop

- Update time of 250µs; bandwidth 150Hz
- Gains in real SI units
- Increased precision in positioning systems and high performance section control
- Selectable gain sets for speed profiling and multi-motor operation
- Step-less gain change for on-line tuning
- Fully selectable feedback source for flexibility

Torque loop

- Update time of 83µs; typical bandwidth 830Hz
- 'in-motion' transfer between open and closed loop control
 - for high speed machine tool spindles
- Torque feed forward for minimal speed error during acceleration
- Set point to two decimal places for precision torque applications, such as dynamometer test rigs

Motor


- Open loop, closed loop, servo, linear
- 40,000rpm maximum shaft speed
- Output frequency to 3kHz open loop and 1.2kHz closed loop
- Up to 16kHz switching frequency for near silent operation
- Second motor map for rapid change between motors
- Support for embedded motor map in encoders with serial communications

Protection systems

- Independent thermal protection for options, control, power stage, brake resistor and motor
- On drive thermal model dynamically controls switching frequency and drives cooling fan speed to ride through thermal overloads
- Supply disturbances: Phase loss, imbalance, brown out, notching, over voltage
- Wiring errors: Output short, output earth fault, I/O overload, encoder wire break and short circuit
- Polarised control connectors – cannot be mixed up



ON BOARD DIGITAL INPUTS/OUTPUT

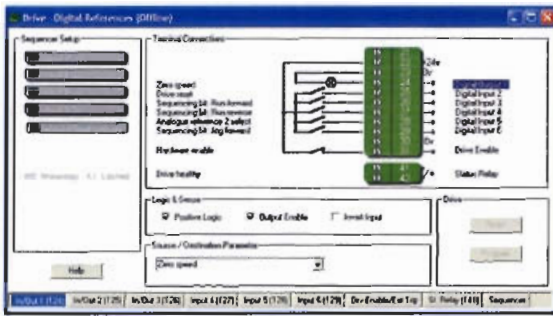

Analog inputs

- 1 High precision (16 bit plus sign) differential
- 2 General purpose (10 bit plus sign) with update times of 250µs or 4ms

Analog outputs

- 2 General purpose voltage or current (10 bit plus sign) with 4ms update time

Digital inputs

- 1 Secure Disable, 3 general purpose at 4ms update with the possibility of 2 having a 250µs update when configured as limit switch inputs

Selectable digital outputs/inputs

- 3 General purpose at 4ms update time. 1 relay output; normally open. 1 relay driver output.

ENCODER FEEDBACK


Compatibility virtually guaranteed with support for 12 different feedback device configurations as standard, including:



Quadrature (up to 400kHz), SinCos (single and multi-turn, Hiperface and Endat), SSI (plus grey code), Frequency and Direction, CW/CCW and Resolver.

Additional universal feedback interfaces with identical specification may be fitted in the option slots, in the form of the SM-Universal Encoder Plus option, for synchronisation and positioning applications. This option also provides an encoder simulation output for all the configurations, other than SinCos.



Simulated Encoder or Motion Controller Gateway

The universal feedback interface enables an "encoder gateway" to be configured with the Unidrive .

Unidrive  can be configured to input one type of reference encoder signal and at the same time output another providing a gateway to your motion controller. By virtue of the three universal option slots, the Unidrive  could have a total of four configurable encoder inputs and three encoder outputs.

SM-APPLICATIONS

Powerful applications module for implementing fully customised PLC and motion solutions, or executing pre-engineered solutions, without the costs normally associated with buying and programming PLCs.



Features:

- Program in function block, ladder or Drive Programming Language with IEC61131-3 based programming tool
- 32 bit RISC processor
- Synchronisation with drive control loops
- 384kbytes of user flash memory, 80kbytes of user RAM, 400 x 32 bit non-volatile registers
- Speed reference and feedback resolution to 3 decimal places
- Torque reference and feedback resolution to 2 decimal places

Programmable User tasks:

- **Clock task:** Synchronised for precise real time control function with selectable update times between 4ms and 200ms
- **Position tasks:** 2 are available, synchronised with the drive position loop. One task executes immediately prior to the position loop and one immediately after. Update times selectable from 250µs to 8ms
 - **Drive to drive synchronisation:** may be implemented for multi-axis motion co-ordination, using the RS485 port configured for CTSync mode
- **Event task:** Triggered by timer I/O, software, CTSync or field bus cyclic data

SM-APPLICATIONS LITE

This module allows system designers to offer an intermediary level of Drive Programming Language, Ladder and Function Block programming as an alternative to the full SM-Applications in applications where CTNet, additional I/O, RS485 interface or CTSync are not required.



Unidrive System Design


System designers look to maximise the features of the drive itself, in combination with the integration options to minimise cost whilst maximising performance. Features such as secure disable and back up power supply inputs help to realise system cost reductions.

SECURE DISABLE

Secure Disable is fail-safe, unlike safety relays. When the input is disconnected the drive will not operate the motor, even with a combination of internal drive faults. Secure Disable is implemented in hardware, totally independent of drive software, and has been certified by BIA.

- Reduces user cost in machine safety designs that must comply with EN954-I category 3, EN81-I lifts
- Allows the drive to become part of the machine safety system
- Prevents the drive from turning the motor, with a very high degree of confidence


Simple stop/start control to EN954-I category I

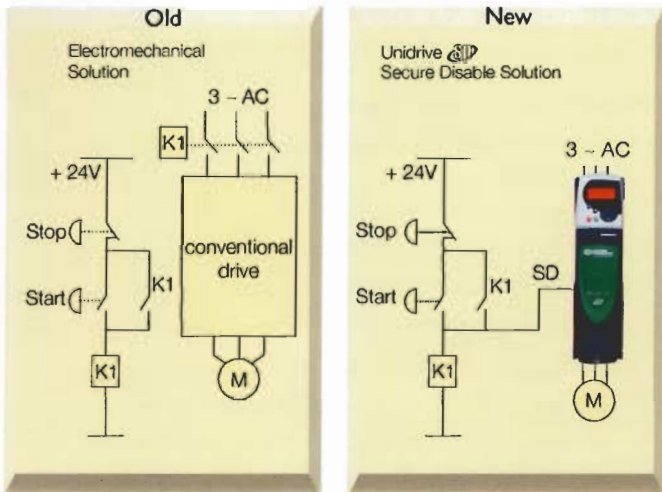

● Component cost and space saving in system design

- Eliminate one or more power contactors
- Eliminate feedback checking arrangement
- Drive can be powered continuously, maintaining auxiliary functions
- A continuous 24V supply can be taken from the drive for auxiliary control purposes

Fail safe interlock to EN954-I category 3

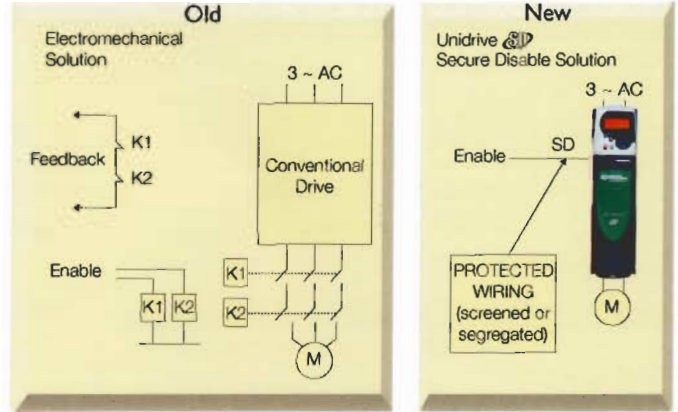


- Secure Disable can form part of a EN954-I Cat 4 system (or a need of EN81-I for lift industry) by adding control circuitry. Consult your local Drive Centre or Distributor

Detailed drawings and implementation help can be found in: "A Guide to the Unidrive  Secure Disable Function".

BACK UP POWER SUPPLY INPUTS


● 24Vdc input – control


Allows the control circuits of Unidrive  to remain active with AC supply removed. This enables fieldbus modules, application modules and encoders to continue to operate

● 48-96Vdc input – power

Allows for motor operation in an emergency back-up situation following loss of AC supply (in elevators) or to limit the speed of a motor during commissioning (eg robot cell)

THROUGH-HOLE MOUNTING


For convenient heat dissipation and cubicle size reduction all Unidrive  frame sizes can be through-hole-mounted. An IP54 mounting kit is included as standard and IP54 fans are available as an option.

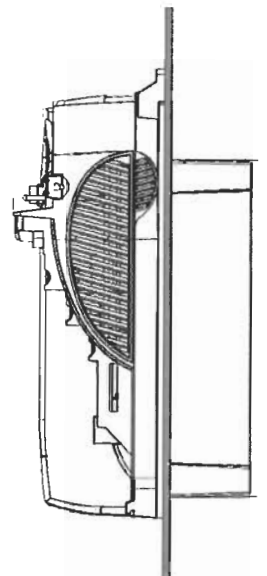

UNIDRIVE INTEGRATION WITH NETWORK CONTROL STRATEGIES


In modern facilities the ability to integrate machine level solutions into factory automation is crucial.

The Unidrive  makes this simple.

Where there is a choice of network control strategy to be made, Unidrive  is equally well suited to centralised, de-centralised or a combination of the two – hybrid.

Centralised control networks


Field bus connectivity enables integration into centralised control systems.

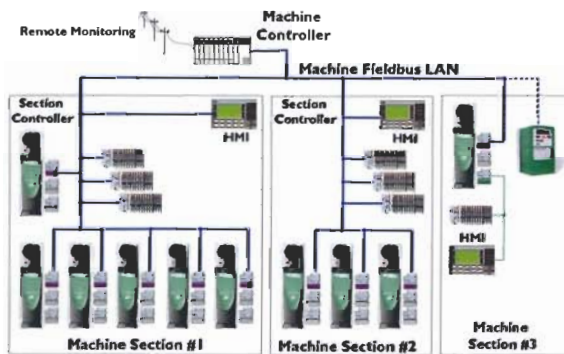

The flexible architecture and 3 universal option slots offer unique opportunities for system configuration, and resource management.


De-centralised control networks

The application processor enables the customer to embed his application program inside the drive for distributed control.

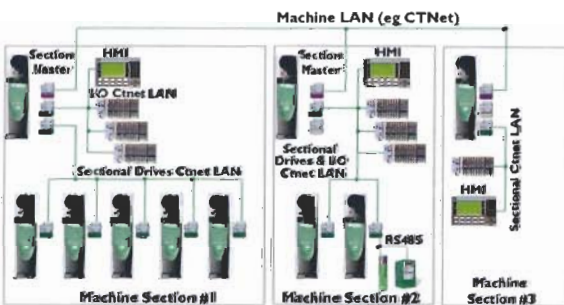


Hybrid (Network segregation)

Networks can be optimised by segregating data by function. For example, low speed high volume supervisory data on one and high speed low volume machine control on another:

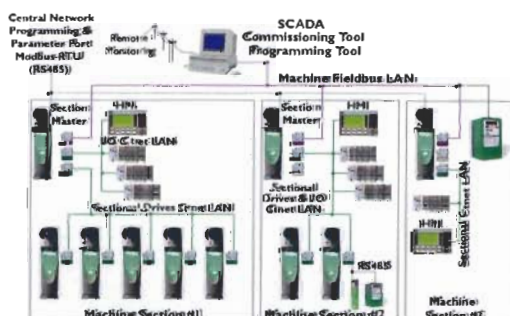


FIELDBUS GATEWAY


Within the drive itself and with no external components, gateways can be configured between any supported networks, saving users that need to bridge between two networks considerable costs, thus allowing OEMs to standardise on one network at the machine with a gateway to any plant network.

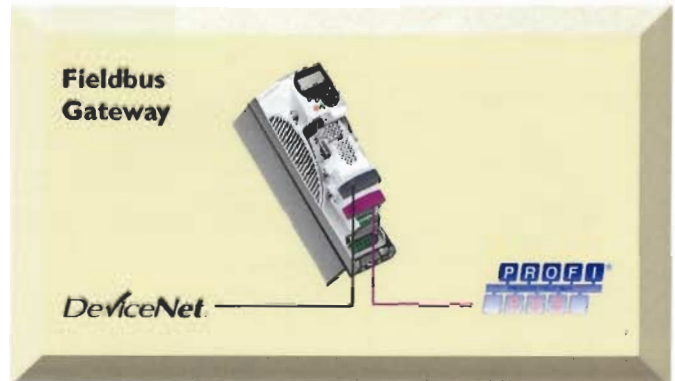




UNIDRIVE REGEN MODE

Unidrive  can be configured to provide full four-quadrant control of the power or drive system. In regen mode, the Unidrive is capable of either supplying power to the DC bus of the Unidrive controlling the motor or removing power from the DC bus of the Unidrive controlling the motor and returning it back to the supply.

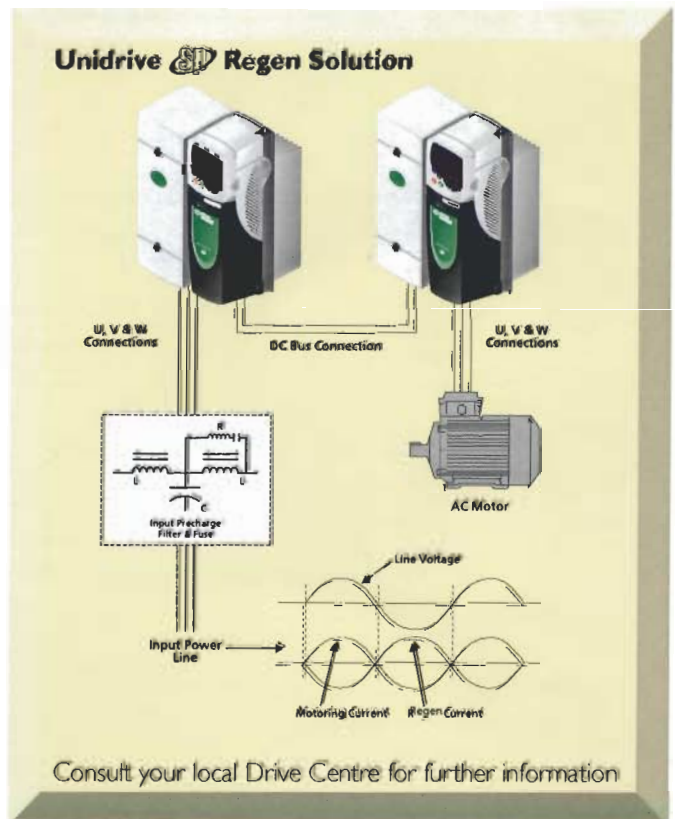
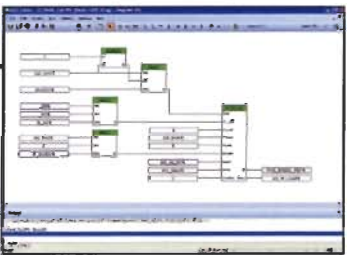
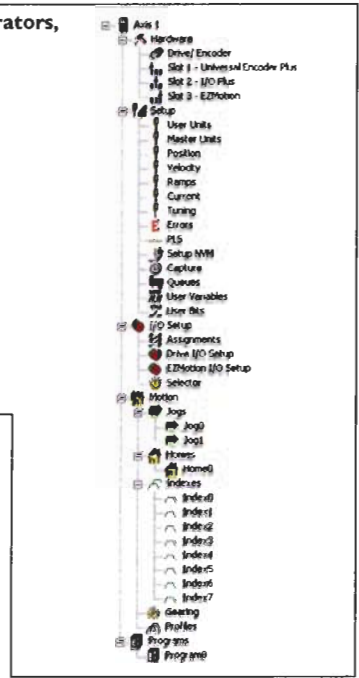
- Unity or controllable Input Power Factor
- Sinusoidal Input Current (Low Harmonic Content)




Integration Tools	Order Code	Description
	SM-Keypad	Two row 7 segment LED displays. Easy to see at distance and in poor lighting conditions. The upper display shows the drive status / current menu and parameter number. The lower display - parameter value or the specific trip.
	SM-Keypad Plus	Multi-lingual backlit LCD display with three lines of text. Line 1 shows drive status / current menu and parameter value or the specific trip. Lines 2 and 3 show the parameter name or the help text. There are five languages as standard: French, Italian, German, Spanish and English plus a custom database for application specific text.
	CTSoft	A common windows tool for all Control Techniques products that enables the user to download and upload parameter setups. Multi-drive parameter setups can be stored as projects and all networks connected to the drive can be browsed.
	HMI	Our HMI partners are Horner and ESA. For more information please contact your local Drive Centre or distributor.
	SM-Applications	Powerful applications module for implementing fully customised PLC and Motion solutions. Replaces micro and small PLCs.
	SM-Applications Lite	As SM-Applications but with 100kbytes of user flash memory and no CTNet interface. I/O, RS485 interface.
	SyPTLite	IEC61131-3 ladder logic software providing all standard PLC logic functions, timers, counters, analogue control and many more. Replaces relay logic components as well as nano-PLCs and saves space. Free-of-charge with purchase of SM-Applications.
	 Pro	Professional drive programming tool kit for OEM's and End Users. Replaces micro and small PLCs. Comprehensive library of PLC function blocks. Interrupt and Motion Tasks; Chargeable with on-line registration.
	SM-EZMotion	A cost effective motion controller providing a simple, fast and effective motion solution. Precise, reliable motion control using its own internal processor. Six high-speed, digital I/O points (4 input & 2 output) the six standard on the Unidrive SP. One-and-a-half axis motion synchronised to a reference encoder (with a resolution of 1000 pulses/rev).
	PowerTools Pro	Windows-based programming software that provides an unparalleled set-up and commissioning environment for all skill levels – professional motion control engineer, infrequent user, or someone new to servo systems. For use with SM-EZmotion.
	SM-PROFIBUS-DP	Supported data rates (bit/s): 12M, 6.0M, 3.0M, 1.5M, 500k, 187.5k, 93.75k, 45.45k, 19.2k, 9.6k. Configurable for 1 or 4 words 5 Predefined Parameter Process Objects (PPOs) fully supported Control Techniques Single Word mode.
	SM-DeviceNet	Up to 500kbit/sec data transmission rate; 8 Predefined Objects, Configurable Polled data words: up to 28 in/out supported
	SM-CANopen	Supported data rates (bit/s): 1.0M, 800K, 500K, 250K, 125K, 100K, 50K, 20K, 10K 4 transmit and 4 receive Process Data Objects (PDOs) supported All synchronous and asynchronous PDO communication modes supported Total of 32 bytes (16 words) in each direction using PDOs Direct mapping of PDO data to and from SM-Applications parameters Service Data Object (SDO) provides access to all Unidrive SP and SM-Applications parameters Heartbeat protocol supported to guard against loss of communications; Emergency object supported
	SM-Ethernet	10 base-T / 100 base-T; Supports web pages, SMTP mail and multiple protocols; DHCP IP addressing; Standard protocols supported
	SM-CAN	Customise your CAN protocol with this interface and SM-Applications: CAN 2.0 Part B passive (11-bit identifier) 14 transmit/receive CAN slots plus 1 receive only CAN slot Supported data rates: 1M, 800K, 500K, 250K, 125K, 100K, 50K, 20K, 10K; Auto-detection of network data rates
	SM-INTERBUS	1 to 10 input/output cyclic data words (16-bit) supported PCP V2.0, Control Techniques Single Word or PPO 4 Word mode non-cyclic data channel (optional)
	SM-SLM	Provides Unidrive SP with SLM functionality to compliment the M'Ax and MultiAx servo product range Encoderless
	CTNet	CTNet is an industrial network designed to be deterministic, robust and tolerant to noise and interference. A maximum of 20 drives can be connected to a CTNet and have a total cable length of up to 100 metres, multiple segments may be connected together. CTNet systems to be managed and extended. A CTNet port is standard with SM-Applications
	SM-SERCOS	Class B compliant. Torque velocity and position control modes supported with data rates (bit/sec): 2MB, 4MB, 8MB Minimum 250 µs network cycle time. Two digital high speed probe inputs (1 µs) for position capture
		SM-Universal Encoder Plus
SM-Encoder Plus		Additional feedback interface for incremental encoders without commutation signals. No simulated encoder outputs
SM-Resolver		Feedback interface for resolvers, with a simulated quadrature encoder outputs
15-way D-type converter		Provides screw terminal interface for encoder wiring and spade terminal for shield
	SM-I/O Plus	Increases the I/O capability by adding the following to the existing I/O in the drive: Digital inputs x 3, Analog inputs x 3, relay x 2, Analog outputs (voltage) x 2
	SM-I/O Lite	Additional I/O (1 x AI (± 10V bi-polar or 4-20mA), 1 x AO (0-10V or 4-20 mA), 3 x DI and 1 x Relay)
	SM-I/O Timer	As per SM-I/O Lite but with the addition of a Real Time Clock for scheduling drive running
	SM-PELV	Isolated I/O to NAMUR NE37 specifications for chemical industry applications
	SM-I/O 120V	Additional I/O conforming to IEC61131-2 120VAC. 6 inputs and 2 non-protected relay outputs rated for 120VAC
External EMC filters	See Filter Order Codes	To comply with the generic emission standards, a full range of external EMC filters has been designed, specifically for the Unidrive SP. The filters are available in a block or a footprint (underneath the drive) or bookend (at the side of the drive). For SP4 to SP7 the filters are block style.
Braking Resistors	1220-2756-01	SP1 heatsink mounted braking resistor: IP54 75Ω at 25°C. Peak power for 1ms is 18kW. Average power for 10ms is 1.8kW.
	1220-2758-01	SP2 heatsink mounted braking resistor: IP54 37.5Ω at 25°C. Peak power for 1ms is 16kW. Average power for 10ms is 1.6kW.

shows
trip type
meter number plus
text databases
parameter sets to all Control Techniques drives.
used. Also allows on-line monitoring
istributor
re-engineered solutions. with CTNet interface, I/O, RS485 interface and CTSync.
or CTSync
comparators...
on-line registration @ SyPTPro.com
tion @ SyPTLite.com
2 output), adding to
encoder module)
nt equally suitable
Free-of-charge, download from ControlTechniques.com.
able cyclic data words, up to 32 in and 32 out supported;
ord or PPO 4 Word mode non-cyclic data channel (optional)



ard RJ45 connection
ifiers only)
rate
der only and Host modes are supported
A single segment of a CTNet network may connect to
gether using CTNet Hubs, allowing large or small drive
3, 8MB and 16MB.
output available
output (voltage) x I,
20VAC operation.
ically for Unidrive SP Up to SP3 these have a choice of two mounting planes
le and mount inline with the supply input terminals or elsewhere
60s is 50W
for 60s is 100W


Motion Made Easy for OEMs, integrators, machine builders and encoders

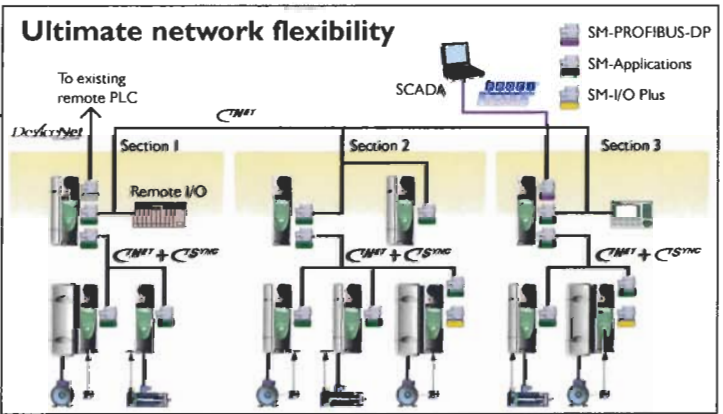
Pro – The drive automation tool to make your machine or factory more productive



Example of Unidrive SP integrating distributed control

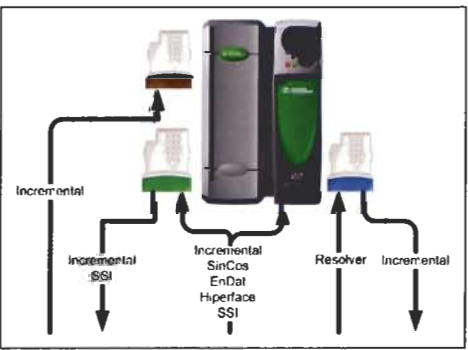


Unidrive SP gives users the freedom to select and/or 'gateway' feedback signals



A wide range of additional I/O options to suit all applications

Unidrive PLC & Motion Functionality

Today's machine designers and users aim to find the most cost effective method of achieving advanced machine control through the optimum deployment of processing resource, software, and hardware.

The scalability of Unidrive , with its choice of programmable options and tools, enables users to implement the correct level of PLC logic and machine control for their applications.

To optimise the design strategy, there are dual customisation methods with associated options and tools. Select the method that suits your application:

Either SyPT IEC61131-3 based approach...


- Perfect match for machines and applications that are:
 - High volume / high performance
- Different levels of scalable customisation
 - On-board (no options)
 - SM-Applications Lite
 - SM-Applications


...Or convenient Motion Made Easy approach


- Perfect match for machines and applications that are:
 - Low volume / low engineering time / high performance
- SM-EZMotion option module
- Simple 5-step process

The drive automation tool to make your machine or factory more productive

SyPTPro is the professional drive-programming toolkit with easy-to-use 'PLC-like' functionality. SyPTPro brings a new level of drive integrated performance and features, from simple single-drive applications requiring run, speed or I/O control through to fully networked multi-drive systems for machine and process control applications.

Unidrive  together with SM-Application or SM-EZ Motion options forms a fully digital high performance motion control system:

- 250µs position control loop update
- To maximise performance the position control loop is synchronised accurately to drive speed and current loops
- To implement real time control, each option is synchronised with the drives internal control loops with $\pm 0.6\mu\text{sec}$ jitter
- Unidrive  may be connected to most encoder feedback devices including high-resolution SinCos encoders. Encoder resolution improves the positioning accuracy and performance of the system
- Additional feedback option modules allow master/slave configurations such as electronic gearbox, flying shear or rotary knife

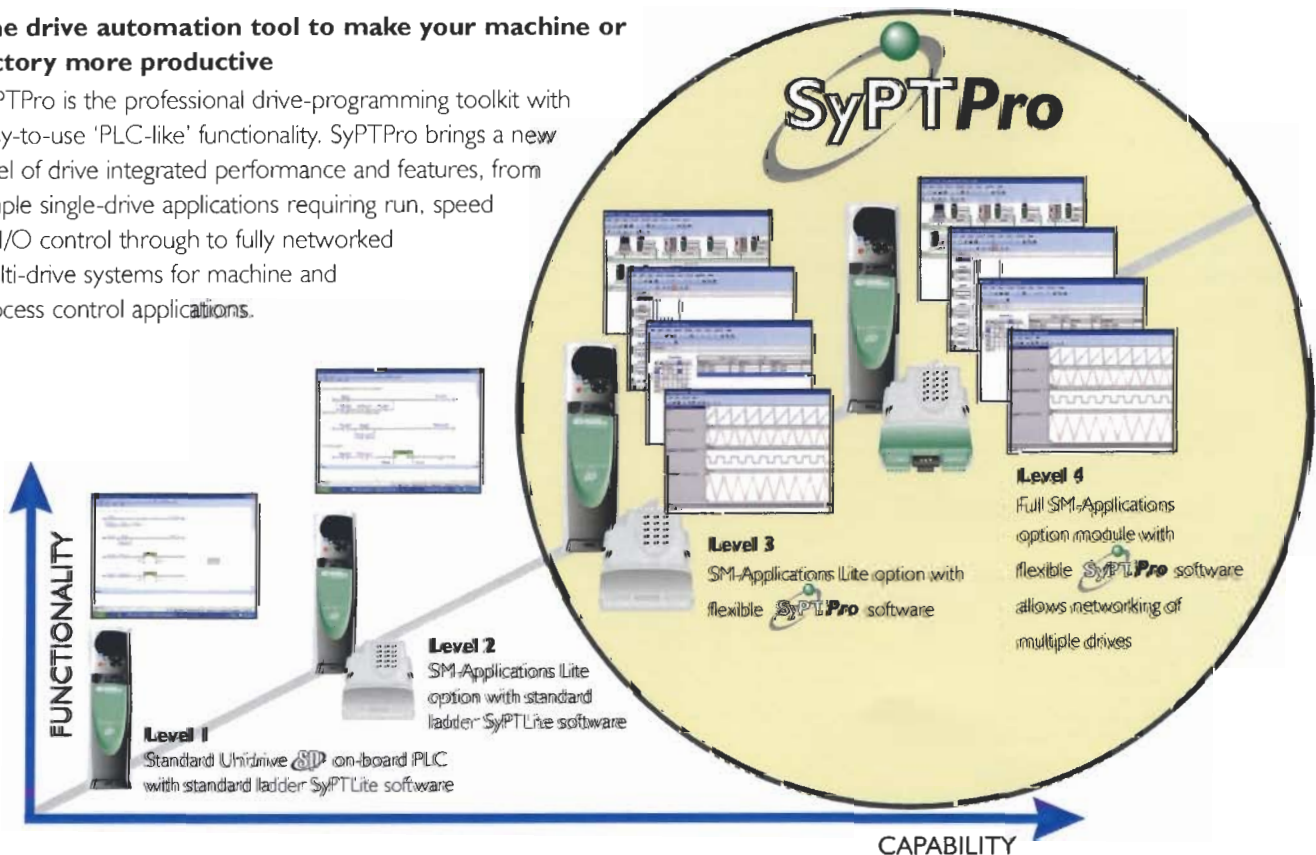

Level 1 SyPTLite – IEC61131-3 Software free with registration via www.controltechniques.com or SyPTLite.com



No options required

Unidrive 

User benefits

- All standard PLC logic functions, timers, counters, analogue comparators... and many more
- Replaces relay logic components as well as nano-PLCs and saves space
- Up to 50 ladder logic rungs
- 7 function blocks and 10 contacts per rung
- More than 150 instructions

Typical applications

- Ancillary pumps, fans and control valves, interlocking logic, sequencing routines

Level 2 SyPTLite – IEC61131-3 Software free with registration via www.controltechniques.com or SyPTLite.com



SM-Applications Lite Option Module

Unidrive 

Extra user benefits above level 1

- Replace micro-PLCs
- Real time PLC to drive communication via internal dual-port RAM
- Real time clock task synchronised to drive control loops
- Up to 150 ladder logic rungs
- Almost unlimited function blocks and contacts per rung
- More than 500 instructions

Typical Applications

- Time critical sequencing, cam switches, hoist and crane control, conveyor positioning

Level 3 SyPTPro – IEC61131-3 Software with user licence via www.controltechniques.com or SyPTPro.com



SM-Applications Lite Option Module

Unidrive 


User benefits above level 2

- Replaces micro and small PLCs
- Comprehensive library of PLC function blocks
- Interrupt and position loop tasks
- Create variables – 32 bit integer, single and double precision floating point
- More than 5,000 instructions
- Preconfigured software available, as function blocks, for winders, flying shears and fan & pump duty assist applications


Typical Applications


- Centre winder, cam (multiple interpolation), gearing / digital lock using the SM-Encoder Plus (2nd encoder input) option, speed functionality

Level 4 SyPTPro IEC61131-3 Software with user licence via www.controltechniques.com or SyPTPro.com

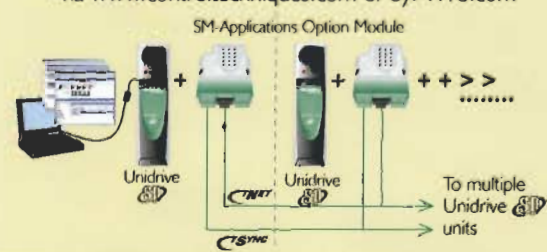

SM-Applications Option Module

Unidrive 

To multiple Unidrive  units

User benefits above level 3


- Replaces small, medium and large PLCs with single or multiple SM-Applications option modules
- Create PLC Ladder logic, Function block or DPL (Drive Programming Logic) programs on the SM-Applications option module
- Extensive PLC functions library
- More than 20,000 instructions
- Range of extended I/O gives almost limitless additional I/O via CTNet on the SM-Applications option module
- Multiple SM-Applications option modules can be linked together to achieve decentralised automation architecture and can be synchronised using the standard on-board and bus connections
- CTSync: a high performance communication link that enables multi-axis control with < 4µsec jitter

Typical Applications

- Paper machines, rolling mills, gearing, digital lock
- Distributing data such as speed or torque references for web control applications (e.g tension control, cascade control etc) on a multi drive network

CTSYNC – CTSync is a high performance communication link that can improve your machine's performance and reduce the cost of your control system. CTSync is standard with SM-Applications. It provides synchronisation between drive control loops thus allowing the creation of a virtual master reference.

Traditional master / slave synchronisation

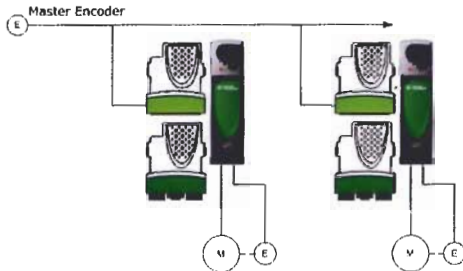


Disadvantages of traditional master/slave:

- High resolution SinCos encoders and (SLM) Encoders cannot be multi-dropped
- Difficult connections required for many encoder types, minimum of 6 wires
- Expensive encoder options required on every slave
- Drives software and control loops not synchronised between all drives preventing effective co-ordinated multi-axis position control
- Not always possible to connect a master encoder

Using a Virtual Master Reference:


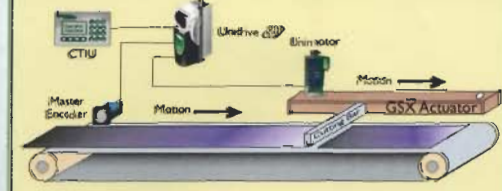
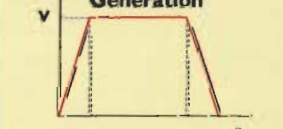


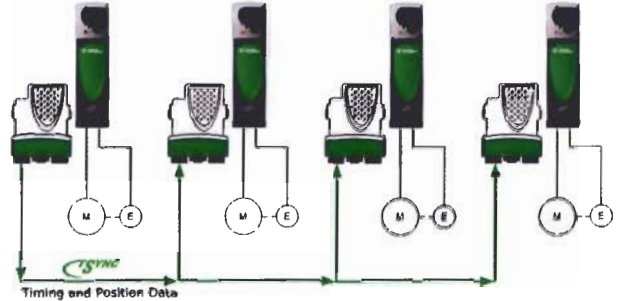





Example: Motion control with 4 axis linear interpolation



Advantages of 'Virtual Master':


- Co-ordinated multi-axis control with < 4µsec jitter
- Solution for when a real encoder cannot be physically fitted to a machine
- Cleaner noise free signal for guaranteed performance
- Compensation with feed-forward
- Choice of encoder resolution

MOTION APPLICATIONS WITH SyPTPro, SM-APPLICATIONS AND UNIDRIVE

<p>CAM – Applications: Any synchronous motion applications, flying shear, rotary knife, etc</p> <ul style="list-style-type: none"> ● Multiple interpolations between each co-ordinate of the master & slave <ul style="list-style-type: none"> - Linear – Constant velocity - Square – Linear ramped velocity - Cosine – Sine ramped velocity - All the above can be from 0 velocity or an offset velocity ● Single shot or continuous cycling of the CAM modes ● Dynamic change of CAM segment, e.g. start and finish ● Master and Slave co-ordinates are entered as array elements, which can be dynamically changed on the fly or fixed in flash memory 	<p>CAM</p> 	<p>Flying Shear - Intime</p> 	
<p>Position Profile Generator – Applications: indexing & point to point</p> <ul style="list-style-type: none"> ● Linear ramps ● Acceleration, max speed and Jerk parameters can be dynamically changed on the fly 	<p>Index Position Profile Generation</p> 	<p>Feeder Application</p> 	<p>Extend – retract</p> 
<p>Speed Profile Generator – Applications: jogging, homing</p> <ul style="list-style-type: none"> ● Linear or 'S' ramps ● Acceleration, max speed and Jerk parameters can be dynamically changed on the fly 	<p>Speed Profile Generation</p> 	<p>Bridle Control</p> 	<p>Wire Drawing</p> 
<p>Electronic Gear Box (Digital Lock) – Applications: Master follower applications, conveyors etc</p> <ul style="list-style-type: none"> ● Wide range of Gear ratios, 32bit integer Numerator/Denominator ● Rigid Lock - ramp to ratio line speed and recover lost position during acceleration, then lock into line position ● Non-Rigid Lock - ramped to ratio line speed and lock into line position ● Lock, No ramps, lock into line position, like a true gearbox 	<p>Digital-Lock</p> 	<p>Shaftless Offset Printing</p> 	<p>Digital Lock Electronic Lineshaft</p> 

Unidrive **SD** Configuration & Set Up


SMART

- Easy parameter & program loading
- Simplified maintenance and set up
- Machine upgrades can be shipped on a SMART  and easily installed
- Low cost archiving saving of parameter set up
- Save up to 128 complete sets of parameters
- Save and restore onboard SyPTLite application programs
- SELV comms port – single point access for all drive configuration and programming tools



CTSOFT

A PC configuration tool for all Control Techniques products to download/upload parameter sets to drives. It stores multi-drive parameter set-ups as projects and can browse all CTNet networks connected to the option slots of the drive.

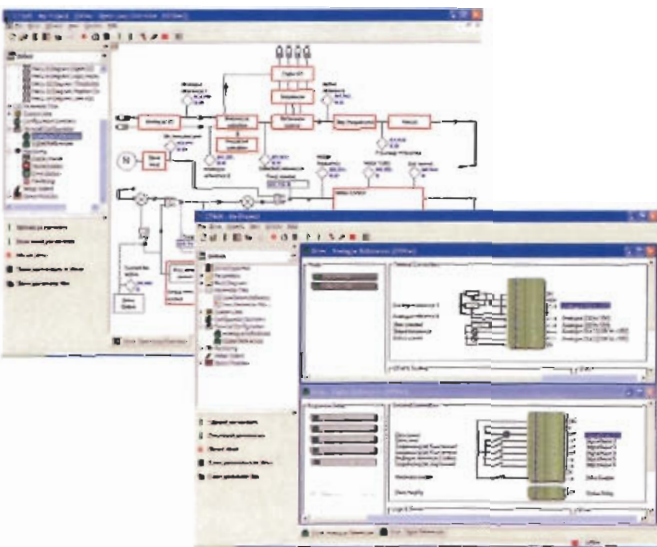

- All functions are accessed from a tree view and include all Unidrive **SD** options
- CTSOFT handles multiple options on one drive, including 3 off SM-Applications or multiple field buses. Parameter files can be imported/exported to other applications
- Customisable set up wizard to tailor the drive to an application or industry, with familiar units or terminology
- On-line monitoring of drive parameters including drive logic diagrams

SELECT KEYPAD

No Keypad	Standard format. Ideal for high volume applications where drive can share keypad for set up. Excellent security feature
SM-Keypad	Low cost, hot pluggable, 7 segment LED display
SM-Keypad Plus	Multi-lingual, hot pluggable, backlit LCD display, with customisable database for application specific text and a help function
HMI	A range of touch screen HMI's (Human Machine Interface) are available from local Drive Centres/Distributors


SM-Keypad Plus




SM-Keypad



HMI Range



Customisation tool for SM-Keypad Plus

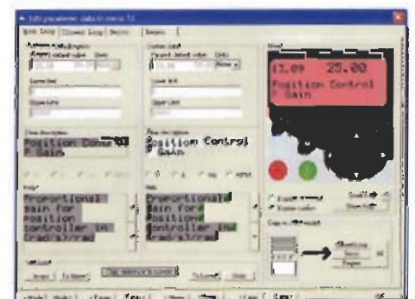

INTERNAL BRAKE RESISTORS


The Unidrive **SD** 1 and 2 have an optional space-saving heatsink mounted self-fusing resistor – no external overload needed.




BUILT-IN EMC COMPATIBILITY

Built-in filter allows drive to comply with EN 61800-3 (standard for Power Drive Systems) with 4m motor cable, and it continues to work and reduce emissions up to 100m.

'MOTION MADE EASY'


For most motion control applications, users are looking for fast set-up, short software learning curves and fill-in-the-dialogue-box, programming that achieves motion profiles quickly and reliably. The Unidrive  'Motion Made Easy' option has been designed specifically for those users.

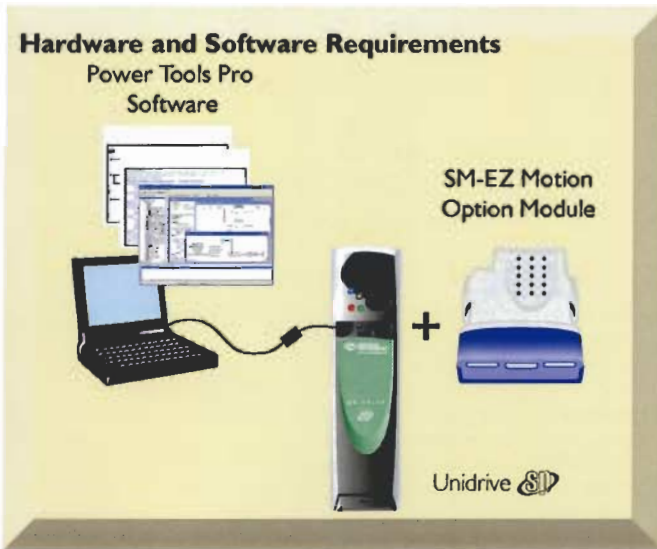

Control Techniques' PowerTools Pro is a Windows™-based programming software that provides an unparalleled set-up and commissioning environment equally suitable for all skill levels – professional motion control engineer, infrequent user, or someone new to servo systems.

- "Plug and Play" implementation configures the Unidrive SP parameter settings, making hardware setup almost automatic
- Program the SM-EZMotion without removing the cover or powering down by using the Modbus RTU port on the front of the Unidrive SP
- Data entry simplified using Windows™-based interface
- Fill-in-the-Dialogue Box values
- Point-and-Click Radio Buttons
- Scrolling Menu Selections
- Drag-and-Drop parameters and I/O assignments
- The Hierarchy view provides instant access to all the tools in PowerTools Pro and is the key to "Motion Made Easy"
- PowerTools Pro software is free—go to www.controltechniques.com and download your copy now


SM-EZMotion option

The SM-EZMotion is a cost effective motion controller which clicks into a Unidrive  option slot to give a simple, fast and effective motion solution.


- Precise, reliable motion control using its own internal processor
- Six high-speed, digital I/O points (4 input & 2 output), in addition to the six standard on the Unidrive SP
- One-and-a-half axis motion synchronised to a reference encoder (with encoder module)

Designed to get users up and running quickly with applications such as:

- Conveyor synchronisation
- Feed to sensor/torque
- Labelling and printing
- Parts alignment
- Point-to-point positioning
- Random in-feed control
- Rotary knife
- Thermoforming
- Web control
- Electronic gearing
- Flying cut off
- Multi-lane merge control
- Phase synchronisation
- Product spacing
- Registration control
- Slip compensation
- Traverse winding
- ...and many more

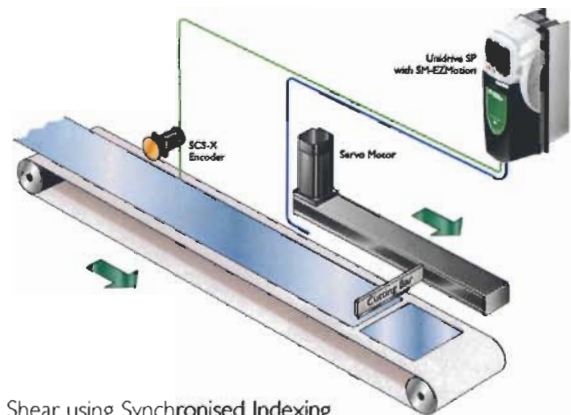


Flying Shear using Synchronised Indexing

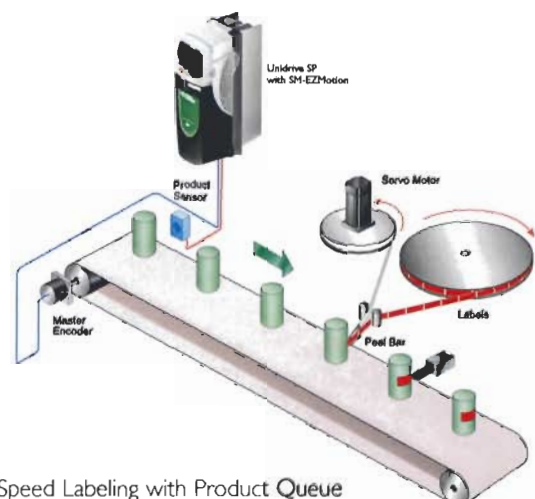

High-Speed Labeling with Product Queue

Specifications

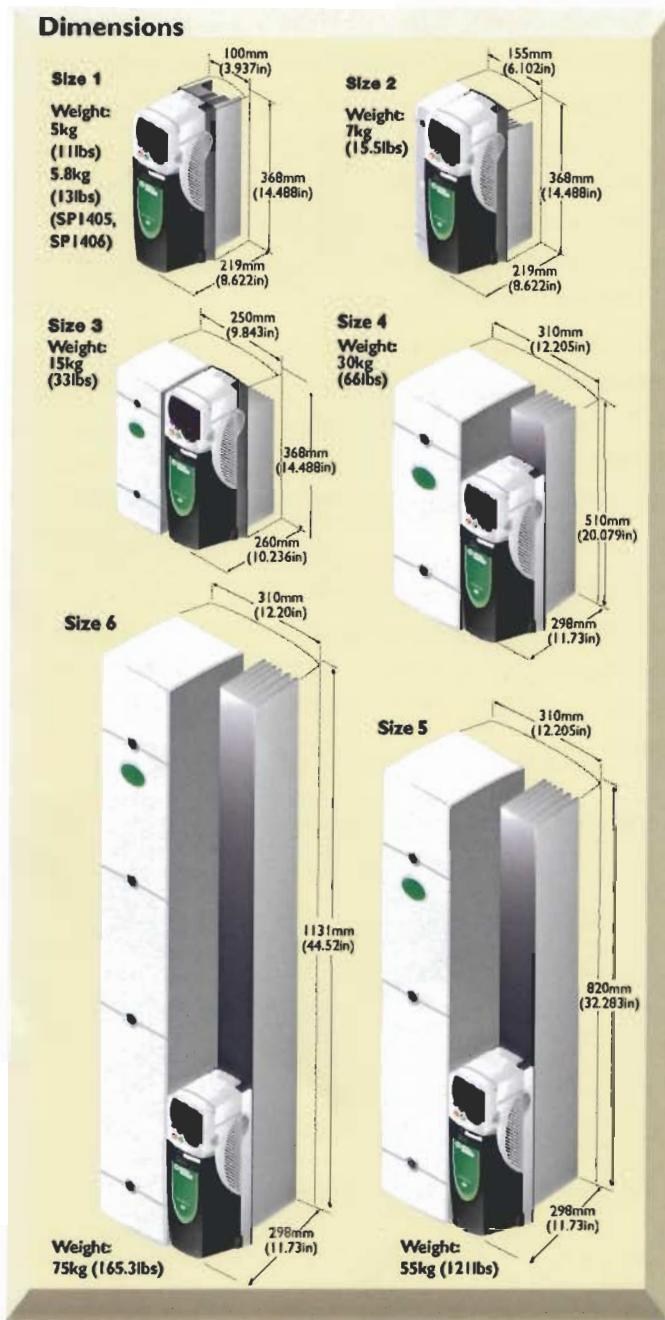



Environmental Safety and Electrical Conformance

- IP20/Nema I rating, IP54 (NEMA 12) through panel mount
- Ambient temperature -15 to +40°C, 50°C with derating
- Humidity 95% maximum (non condensing) at 40°C
- Altitude: 0 to 3000m, derate 1% per 100m between 1000m and 3000m
- Vibration: Tested in accordance with IEC 68-2-34
- Mechanical Shock: In accordance with IEC 68-2-27
- Storage temperature -40°C to 50°C
- Electromagnetic Immunity complies with EN61800-3 and EN50082-2
- Electromagnetic Emissions complies with EN61800-3 (second environment)

- With on board EMC filter: complies with EN61800-3 (first environment)
- EN50081-1 and EN50081-2 with optional footprint EMC filter
- IEC 61000-3-4 Supply conditions
- IEC 60146-1-1 Supply conditions
- IEC 61800-5-1 (Power Drive Systems)
- IEC 61800-5 Safety
- IEC 60364-4-41 Safety
- IEC 60950 Safety
- IEC 60664-1 Insulation
- IEC 60068-2 Physical environmental tests
- IEC 61131-2 I/O
- EN 60529 Ingress protection
- EN 50178 Electrical safety (future IEC 62103)
- Independently assessed by BIA (machine safety authority) to EN 50178
- EN 61000-6-2, EN 61000-6-4 EMC
- EN 954-1 Machine safety + EN 81-1 Elevators
- UL508C, UL873, UL840, UL94VI

Options Ordering

Description	Order Code
Cloning & Programme Storage	Smart Card***
Configuration Tool	CTSoft***
Communications Cable	CT Comms Cable
No Keypad	As standard
LED Keypad	SM-Keypad
Backlit LCD Keypad	SM-Keypad Plus
Operator Interfaces	Consult Drive Centre
Internal Fitting Brake Resistor	†
Internal Fitting EMC Filter	As standard
External Fitting EMC Filters	See table opposite
Universal Encoder Feedback	SM-Universal Encoder Plus
Second Encoder Feedback	SM-Encoder Plus
Resolver Input Feedback	SM-Resolver**
Encoder Screw Terminal Connector	15-way D-type Connector
Extended I/O	SM-I/O Plus
Extra I/O	SM-I/O Lite
Extra I/O with Real Time Clock	SM-I/O Timer
120V I/O	SM-I/O 120V
Isolated I/O	SM-PELV
Remote Network I/O	Beckhoff I/O
Modbus RTU (Standard)	SM-Applications*
PROFIBUS-DP	SM-PROFIBUS-DP
INTERBUS	SM-INTERBUS
DeviceNet	SM-DeviceNet
CTNet	SM-Applications
CANopen	SM-CANopen
CAN Interface	SM-CAN
SLM	SM-SLM
SERCOS	SM-SERCOS
Ethernet	SM-Ethernet
System Programming Co-processor	SM-Applications
System Programming Co-processor	SM-Applications Lite
Motion Made Easy Co-processor	SM-EZMotion**
SyPTLite Software Tool	Free with Unidrive 
SyPTPro Software Tool	SyPTPro
PowerTools Pro Software Tool	Free at ControlTechniques.com
Dual Mode Winder Software	SSP-4000-0010
Flying Shear Control Software	SSP-4000-0020
Fan and Pump Duty	
Assist Software	SSP-4000-0030

* Provides additional Modbus RTU port ** Only one of these modules per drive
 *** Supplied as standard with Unidrive  † SPI: 1220-2756-01 SP2: 1220-2758-01

Ratings & Order Codes

Note Select model on actual motor full load current

Frame Size	Supply Voltage +/- 10%	Order Codes	Normal Duty			Heavy Duty			
			Typical Motor Output Power (kW)	(hp)	Max Cont Current I _N (A)	Typical Motor Output Power (kW)	(hp)	Max Cont Current I _H (A)	
1	200-240VAC (kW@220V) (hp@230V)	SP1201	1.1	1.5	5.2	0.75	1	4.3	
		SP1202	1.5	2	6.8	1.1	1.5	5.8	
		SP1203	2.2	3	9.6	1.5	2	7.5	
		SP1204	3	3	11	2.2	3	10.6	
2		SP2201	4	5	15.5	3	3	12.6	
		SP2202	5.5	7.5	22	4	5	17	
		SP2203	7.5	10	28	5.5	7.5	25	
3		SP3201	11	15	42	7.5	10	31	
		SP3202	15	20	54	11	15	42	
4		SP4201	18.5	25	68	15	20	56	
		SP4202	22	30	80	18.5	25	68	
			SP4203	30	40	104	22	30	80
1	380-480VAC (kW@400V) (hp@460V)	SP1401	1.1	1.5	2.8	0.75	1	2.1	
		SP1402	1.5	2	3.8	1.1	1.5	3	
		SP1403	2.2	3	5	1.5	3	4.2	
		SP1404	3	5	6.9	2.2	3	5.8	
		SP1405	4	5	8.8	3	5	7.6	
		SP1406	5.5	7.5	11	4	5	9.5	
2		SP2401	7.5	10	15.3	5.5	10	13	
		SP2402	11	15	21	7.5	10	16.5	
		SP2403	15	20	29	11	20	25	
3		SP2404	15	20	29	15	25	29	
		SP3401	18.5	25	35	15	25	32	
4		SP3402	22	30	43	18.5	30	40	
		SP3403	30	40	56	22	40	46	
		SP4401	37	50	68	30	50	60	
5		SP4402	45	60	83	37	60	74	
		SP4403	55	75	104	45	75	96	
6		SP5401	75	100	138	55	100	124	
		SP5402	90	125	168	75	125	156	
6		SP6401	110	150	202	90	150	180	
		SP6402	132	200	236	110	150	210	
3		575VAC (kW@575V) (hp@575V)	SP3501	3	3	5.4	2.2	2	4.1
			SP3502	4	5	6.1	3	3	5.4
			SP3503	5.5	7.5	8.4	4	5	6.1
			SP3504	7.5	10	11	5.5	7.5	9.5
	SP3505		11	15	16	7.5	10	12	
	SP3506		15	20	22	11	15	18	
	SP3507		18.5	25	27	15	20	22	
	4		SP4603*	22	30	36	18.5	25	27
			SP4604*	30	40	43	22	30	36
			SP4605*	37	50	52	30	40	43
5	SP4606*		45	60	62	37	50	52	
	SP5601*		55	75	84	45	60	62	
6	SP5602*		75	100	99	55	75	84	
	SP6601*		90	125	125	75	100	100	
			SP6602*	110	150	144	90	125	125
4	690VAC (kW@690V) (hp@690V)		SP4601	18.5	25	22	15	20	19
			SP4602	22	30	27	18.5	25	22
			SP4603	30	40	36	22	30	27
			SP4604	37	50	43	30	40	36
			SP4605	45	60	52	37	50	43
		SP4606	55	75	62	45	60	52	
5		SP5601	75	100	84	55	75	63	
		SP5602	90	125	99	75	100	85	
6		SP6601	110	150	125	90	125	100	
		SP6602	132	150	144	110	150	125	

Notes: * The same model can be used on a 575V or a 690V supply, and has two different output ratings. For example: A Normal Duty SP4603 is suitable for a 22kW output motor on a 575V supply and a 30kW output motor on a 690V supply. Can be used on:

- IT supplies - all voltages
- Grounded delta supplies - all voltages except 690V

Normal Duty (open loop)

Suitable for most applications, current overload is set at 110% for 60 seconds. Where motor rated current is less than the drive rated continuous current, higher overloads are achieved.

Heavy Duty (open loop vector, closed loop or servo)

Suitable for demanding applications, current overload is set at up to 125% for 40 seconds. Where motor rated current is less than the drive rated continuous current, higher overloads (200% or greater) are achieved.

Optional External EMC Filters

Drive	Order Code
SP1201 to SP1202	4200-6118
SP1203 to SP1204	4200-6119
SP2201 to SP2203	4200-6210
SP3201 to SP3202	4200-6307
SP4201 to SP4203	4200-6406
SP1401 to SP1404	4200-6118
SP1405 to SP1406	4200-6119
SP2401 to SP2404	4200-6210

Drive	Order Code
SP3401 to SP3403	4200-6305
SP4401 to SP4403	4200-6406
SP5401 to SP5402	4200-6503
SP3501 to SP3507	4200-6309
SP4601 to SP4606	4200-6408
SP5601 to SP5602	4200-6504
SP6401 to SP6402	4200-6603
SP6601 to SP6602	4200-6604

Providing Solutions for Industries & Motion Applications

Control Techniques drives are found in nearly every industry where electric motors are used, providing outstanding reliability, performance, safety and economy. Engineers and machine builders specify Control Techniques drives because they are easily integrated and generate productivity and cost-savings often exceeding expectations.

Automotive

- Chassis Marriage Systems
- Wheel Alignment Systems
- Riveting
- Tyre Mounting
- Paint Shop HVAC
- Test Rigs
- Roll & Brake Test Machines
- Headlight Aiming
- Sub-Assembly Machines
- Laser Welding
- Wind Tunnels



Unidrive's integration flexibility is making it the "standard" drive in automobile plants around the world. The rolling test rig, shown, performs simulated road testing of front-wheel, rear-wheel and four-wheel drive vehicles, checking motor, brake, and gearbox performance, road-noise decibel levels, and the car's ABS and ACS systems.

Packaging

- Form / Fill / Seal Machines
- Labelers
- Case Packers
- Carton and Case Erectors
- Baggers
- Bundlers
- Shrink Wrappers
- Smart Belts
- Indexing Tables




The Dual Mode Winder Solution is one of the pre-programmed, basic application solutions developed by Control Techniques for its AC, DC and Servo drives.

Plastics and Rubber

- Extruders
- Mixing
- Core Pulling
- Dual-Turret Winders
- Rotary Knife
- Feeders Heat Sealers/Perforators
- Compounding
- Pullers
- Slitters
- Re-spoolers
- Flying Shear



This oval-tube packaging printer has over 40 servomotors and several AC induction motors.

Cost savings were achieved using the Unidrive  with an SM-Applications module together with several Commander SE drives to complete this one-of-a-kind machine.

Printing

- High-speed Labelers
- Flexographic Printing
- Electronic Line Shafting
- Infeed & Pay-off Machines
- Web Printing
- Sheet-fed Printing
- Bindery Machines
- Packaging and Palletising



Precision drive-to-drive synchronisation with CTSync on the Unidrive has revolutionised the printing industry with new, "jitter free" 8- and 10-colour flexographic presses. Retrofits with this gearless technology are giving older presses new life and greater flexibility.

Paper, Film and Foil

- Blown and Cast Film
- Laminating
- Vinyl
- Calendaring
- Slitting
- Winders
- Coating
- Metallising
- Embossing
- Drying
- Tubing



Rugged reliability, application flexibility, conformance to industry standards, and safety features have made our digital AC and DC drives the benchmark for drives in the metals industry.

Metals

- Annealing
- Tinning
- Pushers
- Tilt Vessels
- Casters
- Run-out Tables
- Skip Hoists
- Transfer Cars
- Galvanising
- Torch Machines
- Pilers
- Bar and Rod Mills
- Downcoilers
- Pinch Rolls
- Unit Rolls



The powerful and versatile Unidrive is the number one drive in both new installations and retrofits.

Materials Handling

- Augers
- Container Cranes
- Grab Buckets
- Palletising
- Smart belts
- Stacking
- Conveyors
- Gantry Systems
- Lift Systems
- Pick and Place
- Sorting



From anthracite to zinc, from deep in the mountain to on top, Control Techniques drives move industry's raw materials.

Mining

- Centrifuges
- Crushers / Hammer Mills
- Excavators
- Pumps
- Conveyors
- Grab Buckets
- Loaders

Other Industries and Applications Relying on

Control Techniques Solutions Platform Drives include:

- Aerospace
- Automated Assembly
- Chemical
- Crane and Hoist
- Fiber and Textiles
- Glass
- Lumber and Timber
- Medical Devices
- Pharmaceutical
- Wire and Cable
- Asphalt and Cement
- Building Materials
- Converting
- Elevator*
- Food & Beverage
- HVAC-R
- Marine
- Oil and Gas
- Water & Waste Water

Need More?





Control Techniques maintains a wealth of information on industry applications on its web site:

www.controltechniques.com

Simply go to the Press page and you will find industry application stories, case studies by industry and product.

*Specific Elevator information and application set ups can be found on LiftDrives.com

Further Information - see www.controltechniques.com

Brochure	Part Number
Motion Functionality with Unidrive 	0175-0327
Motion Made Easy with Unidrive 	0175-0326
PLC Functionality with Unidrive 	0175-0328
An Introduction to Unidrive 	0175-0336
Mentor II Digital DC Drive	0175-0106
Commander SK	0175-0335

Driving the world...

Drive & Application Centres

AUSTRALIA

Melbourne Application Centre
A.C.N. 003 815 281
Tel: 613 973 81777
Fax: 613 9729 3200
After Hours: 61 2 9963 5271

Sydney Drive Centre
A.C.N. 003 815 281
Tel: 61 2 9838 7222
Fax: 61 2 9838 7764
After Hours: 61 2 9963 5271

AUSTRIA

Linz Drive Centre
Tel: 43 7229 789480
Fax: 43 7229 7894810
After Hours: 43 7215 3502

BELGIUM

Brussels Drive Centre
Tel: 32 1574 0700
Fax: 32 1574 0799

CANADA

Toronto Drive Centre
Tel: 1 905 201 4699
Fax: 1 905 201 4694
After Hours: 1 800 893 2321

CHINA

Shanghai Drive Centre
Tel: 86 21 5426 0668
Fax: 86 21 5426 0669

Beijing Application Centre
Tel: 86 10 856 31122 ext 820
Fax: 86 10 856 35029

CZECH REPUBLIC

Brno Drive Centre
Tel: 420 541 192111
Fax: 420 541 192115
After Hours: 420 541 192 119

DENMARK

Copenhagen Drive Centre
Tel: 45 4369 6100
Fax: 45 4369 6101
After Hours: 45 4369 6100

FINLAND

Helsinki Drive Centre
Tel: 358 985 2661
Fax: 358 985 26823
After Hours: 358 500 423271

FRANCE

Angoulême Drive Centre
Tel: 33 5 4564 5454
Fax: 33 5 4564 5400

GERMANY

Bonn Drive Centre
Tel: 49 2242 8770
Fax: 49 2242 877277
After Hours: 49 1714 964777

CHERNITZ DRIVE CENTRE

Chernitz Drive Centre
Tel: 49 3722 52030
Fax: 49 3722 520330
After Hours: 49 1714 964777

DARMSTADT DRIVE CENTRE

Darmstadt Drive Centre
Tel: 49 6251 17700
Fax: 49 6251 177098
After Hours: 49 1714 964777

GREECE

Athens Application Centre
Tel: 0030 210 57 86086/808
Fax: 0030 210 57 86087

HOLLAND

Rotterdam Drive Centre
Tel: 31 184 420555
Fax: 31 184 420721
After Hours: 31 184 420555

HONG KONG

Hong Kong Application Centre
Tel: 852 2979 5271
Fax: 852 2979 5220
After Hours: 852 2979 5271

INDIA

Mumbai Application Centre
Tel: 91 20 612 7956 612 8415
Fax: 91 20 611 3312

Kolkata Application Centre
Tel: 91 83 2357 5302/2357 5306
Fax: 91 83 2357 3435
After Hours: 91 98 3004 8562

Chennai Drive Centre
Tel: 91 44 2496 1123/
2496 1130/2496 1083
Fax: 91 44 2496 1602
After Hours: 91 44 2496 1083

NEW DELHI APPLICATION CENTRE

New Delhi Application Centre
Tel: 91 11 2 576 4782/
91 11 2 581 3166
Fax: 91 11 51 539216

IRELAND

Dublin Drive Centre
Tel: 353 45 448200
Fax: 353 45 433622

ITALY

Milan Drive Centre
Tel: 39 02575 751
Fax: 39 02575 12858
After Hours: 39 02575 751

Vicenza Drive Centre
Tel: 39 0444 396200
Fax: 39 0444 341317
After Hours: 39 02 575 751

KOREA

Seoul Application Centre
Tel: 82 31 703 7169
Fax: 82 31 703 7168
After Hours: 82 31 703 7185

MALAYSIA

Kuala Lumpur Drive Centre
Tel: 603 5634 9776
Fax: 603 5633 9592
After Hours: 60 12 333 8355

REPUBLIC OF SOUTH AFRICA

Johannesburg Drive Centre
Tel: 27 11 462 1740
Fax: 27 11 462 1941
After Hours: 27 11 462 1740

RUSSIA

Moscow Application Centre
Tel: 7 095 232 9472
Fax: 7 095 956 4862

SINGAPORE

Singapore Drive Centre
Tel: 65 6468 8979
Fax: 65 6468 6982
After Hours: 65 9752 5828/
9636 0323

SPAIN

Barcelona Drive Centre
Tel: 34 93 680 1661
Fax: 34 93 680 0903
34 93 680 2823
After Hours: 34 610 554540

Bilbao Application Centre
Tel: 34 94 620 3646
Fax: 34 94 681 1406
After Hours: 34 61 055 4547

Valencia Drive Centre
Tel: 34 96 154 2900
Fax: 34 96 153 2906
After Hours: 34 66 642 8514

SWEDEN

Stockholm Application Centre
Tel: 468 554 241 00
Fax: 468 554 241 10
After Hours: 467 044 183 29

SWITZERLAND

Lausanne Application Centre
Tel: 41 21 637 7070
Fax: 41 21 637 7071
After Hours: 41 79 357 8683

ZURICH DRIVE CENTRE

Zurich Drive Centre
Tel: 41 56 201 4242
Fax: 41 56 201 4243
After Hours: 41 79 357 8683

TAIWAN

Taipei Application Centre
Tel: 886 22325 9555
Fax: 886 22705 9131
After Hours: 886 92186 5502

THAILAND

Bangkok Drive Centre
Tel: 66 2580 7644
Fax: 66 2591 4559
A/Hours Sales: 66 1443 4095
A/Hours Service: 66 1443 4098

TURKEY

Istanbul Drive Centre
Tel: 90 216 4182420
Fax: 90 216 4182423
After Hours: 90 216 418 2420

UAE

Dubai Application Centre
Tel: 971 4 883 8650
Fax: 971 4 883 8651

UNITED KINGDOM

Telford Drive Centre
Tel: 44 1952 213700
Fax: 44 1952 213701
After Hours: 44 1952 213700

USA

Charlotte Application Centre
Tel: 1 704 393 3366
Fax: 1 704 393 0900
After Hours: 1 800 893 2321

Chicago Application Centre
Tel: 1 630 752 9090
Fax: 1 630 752 9555
After Hours: 1 800 893 2321


CLEVELAND DRIVE CENTRE

Cleveland Drive Centre
Tel: 1 440 717 0123
Fax: 1 440 717 0133
After Hours: 1 800 893 2321

Minneapolis US Headquarters
Tel: 1 952 995 8000
Fax: 1 952 995 8020/8099
After Hours: 1 800 893 2321

PROVIDENCE DRIVE CENTRE

Providence Drive Centre
Tel: 1 401 541 7277
Fax: 1 401 541 7266
After Hours: 1 800 893 2321

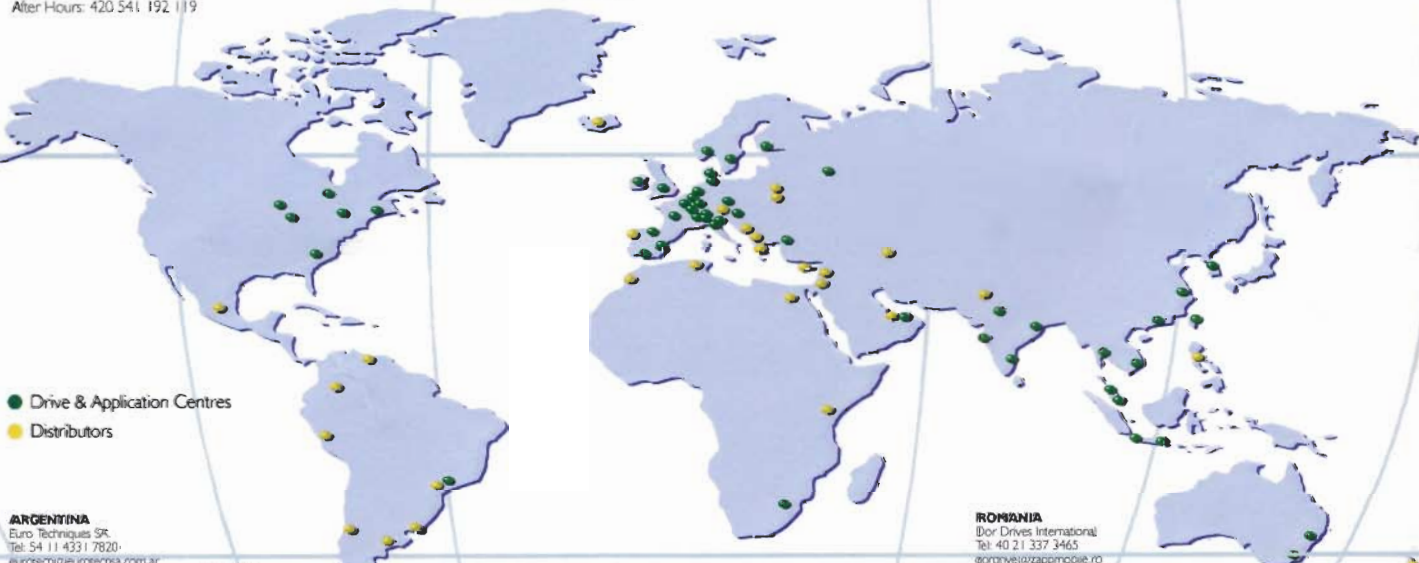

● Drive & Application Centres
● Distributors

Distributors

ARGENTINA

Euro Techniques SA
Tel: 54 11 4331 7820
eurotech@eurotechnics.com.ar

BAHRAIN

Ibikhan Electrical Est
Tel: 973 271 116
leepower@batalco.com.bh

BRAZIL

ACEI Comercio e Servicos LTDA
Tel: 55 11 5565 9798
apei@acei.com.br

Postronic Sistemas Industriais Ltda.
Tel: 55 11 3832 2738
info@postronic.com.br

CHILE

Ingenieria y Desarrollo
Tecnologico SA
Tel: 56 (2) 741 9624
idt@idt.cl

COLOMBIA

Sazonic LTDA
Tel: 57 1 410 0424
joneso.g@colmasnet.net.co

CROATIA

Konar - MES d.d.
Tel: 385 1 366 7273
natava@konar-mes.hr

CYPRUS

Acme Industrial Electronic
Services Ltd
Tel: 3572 5332181
acme@cytelnet.com.cy

EGYPT

Samirah
Tel: 202 7603877/202 7605950
corporate@samirah.com

HUNGARY

Control-VH Kft
Tel: 361 431 1160
info@controlvh.hu

IRELAND

Sammy o'fl
Tel: 354 510 5200
sammy@sammy.ie

INDONESIA

PT Apsilon Indonesia
Tel: 62 6468 8979
oawc@controltechniques.com.my

ISRAEL

Dor Drives Systems Ltd
Tel: 972 3900 7595
info@dor1.co.il

KENYA

Kassam & Bros Co. Ltd
Tel: 2540 2 556 418
650268 557136
kastro@insightkenya.com

KUWAIT

Saleh Jamal & Company WLL
Tel: 965 483 2358
sjong@almullaigroup.com

LEBANON

Black Box Automation & Control
Tel: 961 11 443273
info@blackboxcontrol.com

MALTA

Melania Limited
Tel: 35621 442 039
mfranco@gsan.com

MEXICO

MELCSA
Tel: 52 5 581 1310
melcamx@serve.net.mx

SERVITECK SA de CV
Tel: 52 5 398 3380
servitek@data.net.mx

MOROCCO

Laroy Somer Maroc
Tel: 212 22 354948
lsmaroc@wanadoo.pro.ma

NEW ZEALAND

Electrade New Zealand
Tel: 64 9525 1753
kevin@electrade.co.nz

PHILIPPINES

Bussam Corp
Tel: 632 776 0066
sales@bussam.com.ph

POLAND

APATOR CONTROL Sp. z o.o.
Tel: 48 56 6191 207
drives@apatorbrun.pl

PORTUGAL

Harker Summer SA
Tel: 351 22 947 8090
drives@harkerpt.com

QATAR

AFI Sinal Technologies
Tel: 974 468 4442
js33@qatar.net.qa

ROMANIA

Dor Drives International
Tel: 40 21 337 3465
dorone@zappromovie.ro

SAUDI ARABIA

A. Alburayyan Electric Corp.
Tel: (966 1) 472 9111
aoc-salesmarketing@
alburayyanguroup.com

SERBIA & MONTENEGRO

Master Engineering Group
Tel: 381 24 551 605
master@eunet.yu

SLOVAKIA

EMERSON A.S.
Tel: +421 32 7700 369
jeters@vumax.sk

SLOVENIA

PS Logotec
Tel: 386 1 750 8510
Email: ps-log@ps-log.si

TUNISIA

SA Ben Djermat & CIE
Tel: 216 1 332 923
Email: benjermat@planet.tn

URUGUAY

Secura SA
Tel: 5982 2079815
Email: secura@adinet.com.uy

VENEZUELA

Vertix Instrumentos, S.A.
Tel: 58 281 2674145

VIETNAM

IN Duc Thinh
Tel: 84 8 9490633
Email: info@tech@inlucdinh.com.vn